



## Practicus floor/roof drain DN 70, horiz., Waterpr layer, Des grate

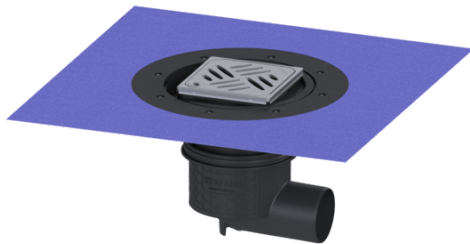

### Article information

Item no.: 45170.53  
GTIN: 4026092052693  
Price group: 10

### Advantages

- Hygiene: hygienic, absolutely corrosion-free and durable material
- Sound insulation: outstanding sound insulation effect confirmed by the Fraunhofer Institute

### Description

The Practicus floor drain is used for point drainage and is equipped with a connection flange as well as a removable odour trap, a lip seal and a temporary protective cover. Including telescopic height-adjustable upper section made of ABS. The drain meets particular sound insulation requirements in accordance with the measurements of the Fraunhofer Institute in Stuttgart. The outlet socket is suitable for connection to SML cast iron pipes. With connection option for equipotential bonding.

Variant

|                                            |                                                                 |
|--------------------------------------------|-----------------------------------------------------------------|
| System:                                    | 125                                                             |
| Waterproofing layer on the upper section:  | Enclosed sealing collar to be glued (bd) according to DIN 18534 |
| Waterproofing layer on the drain body:     | Connection flange                                               |
| Sealing water height:                      | 50 mm                                                           |
| Discharge rate (l/s) with 20 mm backwater: | 1,5                                                             |

General characteristics

|                      |           |
|----------------------|-----------|
| Standard:            | EN 1253-1 |
| Nominal size (DN):   | 70        |
| Outer diameter (OD): | 75 mm     |

Dimensions

|                      |            |
|----------------------|------------|
| Vertical adjustment: | 10 - 23 mm |
| Net weight:          | 2,11 kg    |

|                         |                                                     |
|-------------------------|-----------------------------------------------------|
| Gross weight:           | 3,02 kg                                             |
| Vertical adjustment:    | vertically adjustable upper section                 |
| Packaging dimension:    | length                                              |
| Packaging dimension:    | width                                               |
| Packaging dimension:    | height                                              |
|                         |                                                     |
| Tank/drain body         |                                                     |
| Number of outlets:      | 1                                                   |
| Material of drain body: | PP                                                  |
| System:                 | lateral                                             |
|                         |                                                     |
| Coverage features       |                                                     |
| Type of cover:          | Design cover                                        |
| Cover material:         | Stainless steel 14301                               |
| Colour of cover:        | silver                                              |
| Width of cover:         | 120 mm                                              |
| Length of cover:        | 120 mm                                              |
| Frame material:         | Stainless steel 14301                               |
| Cover locking:          | Lock & Lift                                         |
| Load class:             | L 15 (EN 1253-1)                                    |
| Grating colour:         | Kessel                                              |
| Slip resistance class:  | R9 according to DIN 51130; C according to DIN 51097 |
|                         |                                                     |
| Rim length:             | 132 mm                                              |
| Rim material:           | 132 mm                                              |
| Upper section:          | adjustable in three dimensions                      |
| Upper section material: | ABS                                                 |
| Odour trap:             | included                                            |