



## Ecoguss project drain DN 100, horiz., Variofix, Slotted cover

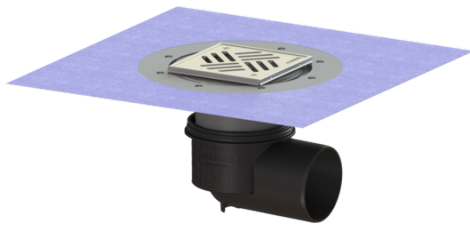

### Article information

Item no.: 48311.51  
 GTIN: 4026092034255  
 Price group: 40

### Advantages

- High-tech Ecoguss composite material
- Highest fire protection standards
- Scientifically confirmed sound protection effect

### Description

The Ecoguss project drain with connection flange is used for point drainage and is equipped with a removable odour trap as well as a lip seal and a temporary protective cover. The recyclable composite material Ecoguss meets the highest noise protection requirements, is temperature-resistant, resistant to aggressive media, and has a permanently corrosion-free surface. It is also briefly flammable from 100 to 400 degrees Celsius. The outlet socket is suitable for connection to SML cast iron pipes. Separate equipotential bonding is not necessary.

#### Variant

|                                           |                                                                 |
|-------------------------------------------|-----------------------------------------------------------------|
| System:                                   | 125                                                             |
| Waterproofing layer on the upper section: | Enclosed sealing collar to be glued (bd) according to DIN 18534 |
| Waterproofing layer on the drain body:    | Connection flange                                               |
| Sealing water height:                     | 50 mm                                                           |

#### General characteristics

|                      |           |
|----------------------|-----------|
| Standard:            | EN 1253-1 |
| Nominal size (DN):   | 100       |
| Outer diameter (OD): | 110 mm    |

#### Dimensions

|                      |                                     |
|----------------------|-------------------------------------|
| Net weight:          | 3,04 kg                             |
| Gross weight:        | 3,8 kg                              |
| Vertical adjustment: | vertically adjustable upper section |
| Packaging dimension: | length                              |

|                         |                                |
|-------------------------|--------------------------------|
| Packaging dimension:    | width                          |
| Packaging dimension:    | height                         |
| Tank/drain body         |                                |
| Number of outlets:      | 1                              |
| Material of drain body: | Ecoguss                        |
| System:                 | lateral                        |
| Coverage features       |                                |
| Type of cover:          | Slotted cover                  |
| Cover material:         | Stainless steel 14301          |
| Colour of cover:        | silver                         |
| Width of cover:         | 138 mm                         |
| Length of cover:        | 138 mm                         |
| Min. flooring height:   | 10 mm                          |
| Surface:                | Polished SST                   |
| Frame material:         | Stainless steel 14301          |
| Cover locking:          | screwed                        |
| Load class:             | K 3 (EN 1253-1)                |
| Rim length:             | 150 mm                         |
| Rim material:           | 150 mm                         |
| Max. flooring height:   | 17 mm                          |
| Upper section:          | adjustable in three dimensions |
| Shape of upper section: | square                         |
| Upper section material: | ABS                            |
| Odour trap:             | included                       |